




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04M 1/27, G10L 5/06</b>	<b>A1</b>	(11) International Publication Number: <b>WO 97/37481</b> (43) International Publication Date: 9 October 1997 (09.10.97)
(21) International Application Number: PCT/CA97/00008 (22) International Filing Date: 9 January 1997 (09.01.97) (30) Priority Data: 08/623,635                      28 March 1996 (28.03.96)                      US (71) Applicant: NORTHERN TELECOM LIMITED [CA/CA]; World Trade Center of Montreal, 8th floor, 380 St. Antoine Street West, Montreal, Quebec H2Y 3Y4 (CA). (72) Inventor: WONG, Chi; Apartment #3390, 2850 Middlefield Road, Palo Alto, CA 94306 (US). (74) Agent: MacGREGOR, George; Northern Telecom Limited, Patent Dept., P.O. Box 3511, Station "C", Ottawa, Ontario K1Y 4H7 (CA).		(81) Designated States: CA, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.

(54) Title: APPARATUS AND METHOD FOR REDUCING SPEECH RECOGNITION VOCABULARY PERPLEXITY AND DYNAMICALLY SELECTING ACOUSTIC MODELS

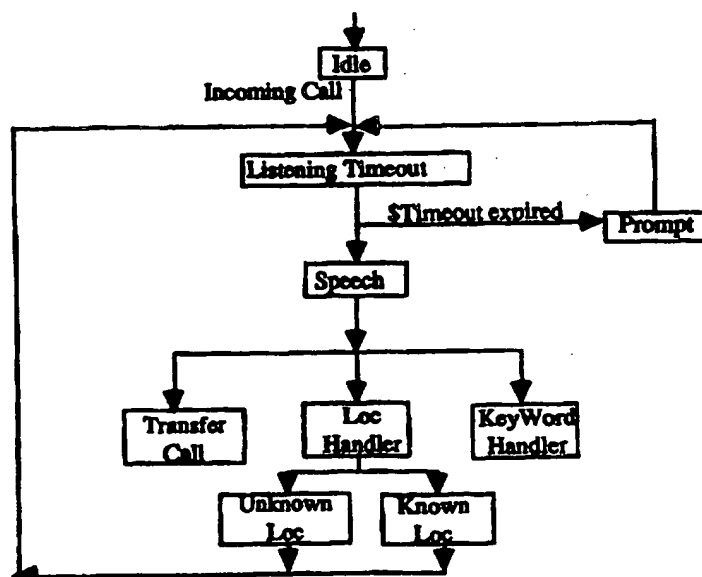

Best Available Copy

## (57) Abstract

A method of reducing the perplexity of a speech recognition vocabulary and dynamically selecting speech recognition acoustic model sets used in a simulated telephone operator apparatus. The directory of users of the telephone network is subdivided into subsets wherein each subset contains the names of users within a certain location or exchange. A speech recognition vocabulary database is compiled for each subset and the appropriate database is loaded into the speech recognition apparatus in response to a requested call to the location covered by the subset. Furthermore, a site-specific acoustic model set is dynamically loaded according to the location of a calling party. An apparatus for carrying out the method is also discussed.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

APPARATUS AND METHOD FOR REDUCING SPEECH RECOGNITION  
VOCABULARY PERPLEXITY AND DYNAMICALLY SELECTING  
ACOUSTIC MODELS

5

Field of the Invention

This invention relates to automatic speech  
recognition in telecommunication systems and to the use of  
such systems to provide large scale voice activated dialing  
10 and information retrieval services.

Background to the Invention

In the early development of telephone systems it  
was commonplace for a telephone subscriber to converse  
15 directly with a telephone operator at a telephone central  
office. The telephone subscriber would verbally request the  
telephone operator to complete a connection to a called  
party. As telephone exchanges were small the telephone  
operator was aware of virtually all of the subscribers by  
20 name and manually completed the requested connection. With  
the advent of dial telephone services, calls within an  
exchange could be completed automatically, and only certain  
toll calls required operator assistance. Today, operator  
assisted calls have become the exception and are usually  
25 comparatively expensive. Machine-simulated operator  
functions, including limited speech recognition services,  
have recently been available for expediting some typical  
operator-assisted functions. This includes "collect" long  
distance calls wherein completion of the connection is  
30 contingent upon the called party agreeing to pay for the  
service. However, these functions are limited to the simple  
recognition of "yes" or "no" so there is little room for  
non-functionality due to uncertainty as to which word was  
spoken. There have also been advancements in voice  
35 recognition services relating to directory assistance but  
these too are directed to a very limited vocabulary.

Prior Art

The prior art contains several recent developments pertaining to voice recognition in general, and to voice recognition applicable to telecommunication systems in particular.

U.S. Patent No. 5,091,947, which issued February 25, 1992 to Ariyoshi et al, entitled "Speech Recognition Method and Apparatus", discloses a voice recognition system for comparing both speaker dependent and speaker independent utterances against stored voice patterns within a coefficient memory. The voice identification comparator selects the one voice pattern having the highest degree of similarity with the utterance in question.

15

In U.S. Patent No. 5,165,095, which issued on November 17, 1992, Borcharding discloses a voice recognition system to initiate dialog to determine the correct telephone number. According to the '095 patent, the calling party is first identified so that a database containing speaker templates can be accessed. These templates are then used to compare the dial command so that the dialing instructions can be recognized and executed. An example of a dialing directive in the patent is "call home", with "call" being the dial command and "home" being the destination identifier.

Gupta et al, in U.S. Patent No. 5,390,278 issued February 14, 1995, disclose a flexible vocabulary speech recognition for recognizing speech transmitted via the public switched telephone network. This voice recognition technique is a phoneme based system wherein the phonemes are modeled as hidden Markov models.

In spite of these ongoing developments, the functionality of automatic recognition of human speech by machine has not advanced to a degree wherein a calling party

can simply speak the called party's name and thereafter be connected as reliably as a human operator in situations where the database for a potential called party is very large (greater than 100 names).

5

#### Summary of the Invention

The present invention is in the field of human speech recognition performed by machines and more particularly relates to a reduction of the perplexity of the speech recognition task in the context of names spoken by a telephone user in a telephone system.

Individual users of telephone networks are divided into subsets to facilitate identification of the vast number of subscribers to the service. In the public network these subsets are local exchanges. Private switching networks such as the Nortel Electronic Switching Network (ESN) assigns individual ESN numbers to each location within the private network. The present invention relies on these subsets or location identifiers to reduce the perplexity of a speech recognition application.

Therefore in accordance with a first aspect of the present invention, there is provided a telephone network including a plurality of telephone exchanges, each for serving a plurality of telephone terminals and each being interconnected with at least one other of the telephone exchanges for providing telephone communications between users of the telephone terminals. The network function includes a simulated telephone operator apparatus for receiving a speech request from a user for connection to another telephone user and to translate this request into a directory number for use by the appropriate one of the telephone exchanges. The translation is in accordance with a speech recognition algorithm and an active speech recognition vocabulary selected in accordance with the origin of the request.

In an ESN application the active speech recognition vocabulary is limited to the names of the individuals serviced by the ESN number. In a preferred embodiment the ESN number, which is also a location code, is  
5 contained in the first two or three digits of the directory number.

In accordance with a second aspect of the invention there is provided a simulated telephone operator  
10 server for a telephone network. The server has means for storing voice utterances of a calling party telephone user and means responsive to location information in association with the telephone user for selecting an active speech recognition vocabulary. Speech detection means are provided  
15 for processing the stored voice utterance in accordance with a speech recognition algorithm and the active speech recognition vocabulary. Directory lookup means identify a directory listing of a called party corresponding to a result of the processing by the speech detection means. The  
20 server also includes means for transmitting the directory listing to a telephone exchange serving the called party.

In accordance with a further aspect of the invention there is provided a telephone exchange comprising:  
25 a plurality of ports for serving a plurality of telephone users' telephone instruments via telephone lines; a trunk facility for connection to another telephone exchange; a switching network for connecting and disconnecting the telephone instruments; a controller means for causing a  
30 newly OFF HOOK telephone instrument to be coupled via the switching network with a solicitation signal, and subsequently for being responsive to a telephone number received in association with the newly OFF HOOK telephone instrument for completing a telephone call via the switching  
35 network. The exchange also includes an originating register means for storing voice band signals received from the newly OFF HOOK telephone instrument via the switching network.

Means are provided for detecting digits represented by frequency signals, within the stored voice band signals, in accordance with a standard for key pad dialed telephone numbers and for transmitting detected digits to the call controller. A simulated telephone operator apparatus receives and translates voice band signals in accordance with a speech recognition algorithm and an active speech recognition vocabulary selected in accordance with the origin of the voice band signals into a directory number for use by the controller means. An interface facility is provided for transmitting the stored voice band signals via the switching network to the simulated telephone operator server apparatus in an event wherein the voice band signals did not include a key pad dialed digit.

15

In accordance with yet a further aspect of the present invention there is provided a method of detecting a voiced speech request of a calling party for connection to another user of an automatic telephone exchange. The method comprises storing a plurality of speech recognition vocabularies in association with geographic location of users; receiving the voiced request and information as to the geographic location of the user having voiced the request from the automatic telephone exchange; selecting an active speech recognition vocabulary in accordance with the information as to the geographic location of the user and, in accordance with a speech recognition algorithm and the selected active speech recognition vocabulary, translating the received request into a directory number for use by the automatic telephone exchange in setting up a telephone connection between the calling telephone user and the other telephone user.

#### Brief Description of the Drawings

The invention will now be described in greater detail with reference to the attached drawings wherein:

FIGURE 1 is a block diagram illustrating trunk connections between private switch locations;

FIGURE 2 is a block diagram of the system hardware architecture;

5               FIGURE 3 is an overall system state diagram; and  
              FIGURE 4 is a state diagram of the key word handler.

#### Detailed Description of the Invention

10               The following description relates to an enterprise-wide speech directory calling service within a company or corporation having a number of locations. Each location is assigned a unique electronic switching network (ESN) location code or ESN number. As shown in the block  
15               diagram of FIGURE 1, the on-site PBX 20 at each location is connected to each other location via trunk connectors 22. In this discussion the ESN comprises a three-digit code to identify the location. It is to be understood, however, that it is not essential to use all three digits to identify  
20               the location as it may be sufficient to use the first two for example.

              FIGURE 2 illustrates the hardware architecture in accordance with a preferred embodiment of the invention. As  
25               shown, PBX 20 is connected to trunk 22 and to a plurality of on site telephone sets as known in the art. The speech recognition system 30 of the invention is connected to the PBX 20 via T1 line 32 via T1 card 34 and via signal link 36 and signal link card 38. Speech recognition system 30  
30               includes a speech recognition processor operating on a speech recognition algorithm, central processor and control units as well as memory cards for storing active speech recognition vocabulary data bases.

35               Although FIGURE 1 refers to a private switching network using ESNs, it is to be understood that the



invention is not limited to such networks but can also be adapted to use in public switching systems.

One objective metric used to measure the accuracy of a speech recognition system is the Word Error Rate (WER). The WER is defined as the total number of incorrectly recognized words made by a speech recognition system divided by the total number of words spoken by a user of the system.

$$WER = \frac{\text{Number of Errors Made by Recognizer}}{\text{Number of Words Spoken by User}}$$

The present invention makes use of information as to the calling party's location for automatically assisting in improving the WER of a speech recognition system on a spoken called party's name for the purpose of connecting a telephone call.

It has been empirically shown that the WER of a speech recognition system will vary with the square root of the perplexity of the vocabulary of words being recognized. [Kimbal, O., et al., "Recognition Performance and Grammatical Constraints", Proceedings of a Workshop on Speech Recognition, Report Number SAIC-86/1546, Defense Advanced Research Projects Agency, Palo Alto, February 19-20, 1986.]

$$WER \propto \sqrt{\text{Perplexity}}$$

The perplexity of a vocabulary is defined as the measure of the constraint imposed by a grammar, or the level of uncertainty given the grammar of a population of users. Perplexity is mathematically modeled and quantified in the following way:

$$H = -\frac{1}{|V|} \sum_{w \in V} P(w) \cdot \log P(w)$$

Best Available Copy

$$B = 2^H$$

where:  $H$  is entropy  
 $P(w)$  is the probability of  $w$  being spoken  
5  $B$  is the perplexity of the application

The vocabulary of words in this implementation consists entirely of proper names, location names, and a small number of key words for command and control. For  
10 large corporations with a large number of employees, the proper names become the determining factor in measuring the perplexity since the number of employees will overwhelm the number of location names and key words. Thus location names and key words can be ignored in this calculation. If we  
15 make a simplifying assumption that every name is spoken with equal probability, then the equation above can be simplified to the following:

$$\text{Perplexity} = \sqrt[L]{|S|}$$

20

where:  $L$  is the average number of words in a sentence  
 $S$  is the number of sentences in the vocabulary  $V$

If we further make the simplification that proper  
25 names contain two words -- first and last name -- and the number of sentences in the vocabulary is equivalent to the number of employee names, then we can further reduce the equation to the following:

$$\text{Perplexity} = \sqrt{|S|}$$

30

If we make the assumption that the amount of confusability between names within a large database will be similar between large databases, the accuracy of a speech  
35 recognition system has the following relationship with the number of names in the vocabulary:

$$WER \propto \sqrt[4]{\text{Number of Active Directory Names}}$$

We can observe from the above equations that the WER increases with the perplexity and thus increases with the number of proper names in the vocabulary.

In the past, speech recognition scientists have used various methods to reduce the perplexity in an effort to improve the WER of a speech recognition system. To achieve this result, most of these efforts have been focused at the linguistic level. For example, scientists have used statistical language models and linguistics rules of phonology to reduce perplexity or uncertainty in recognizing a spoken word or phrase.

In this implementation the list of employee names for each location is stored in a separate speech recognition vocabulary. The employee name will normally be associated with the four digits of the telephone number following the three-digit ESN or location code. According to the system of the present invention a calling party wishing to speak to another employee at the same location will simply announce the first and last name of the employee to whom a connection is desired. The speech recognition system will assume that calling party and called party are at the same location and load the active speech recognition vocabulary database containing the names of all employees at that location. Using a conventional speech recognition algorithm the name spoken by the calling party is compared by the system against the names of all employees in the database and the closest match is selected. The name selected is announced to the calling party and the call is automatically connected to the line associated with the telephone number assigned to the called party unless the calling party interrupts the process by saying, "No." Thereafter the voice recognition system releases from the call.

If the called party is at a different location than the calling party, the calling party will first announce the location of the called party followed by the called party's name. The voice recognition system responds  
5 by announcing the location and subsequently loading the active voice recognition vocabulary database including the names of all the employees at the announced location of the called party. The voice recognition system then selects the  
10 name in the loaded database that most closely matches the name of the called party. The selected name is announced to the calling party and the call is automatically connected to the line associated with the telephone number assigned to the called party unless the calling party interrupts the  
15 process by saying, "No." Thereafter the voice recognition system releases from the call.

Because the active voice recognition vocabulary set associated with each ESN or location contains only a portion of the total number of employees of the corporation  
20 or company, the WER is much lower than it would be if the complete employee directory was loaded in the database.

The actual decrease in the corporate wide WER (C\_WER) is contingent upon how evenly the employees are  
25 spread over the different sites. In the best case where the employees are evenly distributed in each site, C\_WER will decrease according to the following relation.

$$C\_WER = \frac{WER}{\sqrt[4]{n}}$$

30 where: n is the number of sites.

In the worst case, where there is only one employee in each site, except for one site which holds all of the remaining employees, there will be a negligible  
35 decrease in the C\_WER.

$$C\_WER \propto \sqrt[4]{(m-n)}$$

where:  $m$  is the number of employees in the company.

$$C\_WER \approx WER$$

5

for:  $m \gg n$

In a similar way that ESN information is used by the speech recognition system to dynamically load the active vocabulary set, the ESN information can also be used by the speech recognition system to select the appropriate acoustic model set. Speech recognition systems use previously collected speech samples to serve as reference templates against which new spoken speech samples are matched for classification. Statistical pattern recognition techniques are used to match new speech samples against reference templates to determine the closest match. These reference templates are referred to as acoustic models in the speech recognition system. Acoustic models may vary according to the regional accent and subsequently according to ESN locations. The speech recognition system can use site-specific acoustic models that are dynamically loaded based on the ESN information presented at the time of the call. Having site-specific acoustic models will also decrease the WER of the system.

The following specification illustrates an example of the NORTEL Speech Directory Calling Service. The state diagram shown in FIGURES 3 and 4 describes the user interface that users of the service experience and is not meant as an implementation specification. Some parts of the system, such as error recovery and instructions have been omitted.

In the description that follows, the use of *italics* denotes system state and the use of a dollar sign symbol denotes a parameter.

Description of the States in Alphabetical Order:Cancel:

- 5 Play Who  
go to Listening Timeout

Idle:

- 10 /\* Go to Idle anytime a user hangs up \*/  
On an incoming call  
Get ESN information  
Set \$Location based on ESN information  
go to Listening Timeout

15

Keyword Handler:

- Case
- |                    |                             |
|--------------------|-----------------------------|
| Service Locations: | go to Service Location      |
| Receptionist:      | go to Transfer Receptionist |
| 20 Cancel:         | go to Cancel                |
- End Case

Known Loc:

- Set \$Location to \$RecognizedWord
- 25 Play \$Location  
Play EmployeeName  
go to Listening Timeout

30 Listening Timeout:

- Listen for \$Timeout  
If the user speaks  
go to Speech  
Else  
35 go to Prompt

13

Loc Handler:

If \$Location is known location

go to Known Loc

Else

5 go to Unknown Loc

Prompt:

Case (state before Listening Timeout )

10 Idle:

Play Who

go to Listening Timeout

The rest of the states:

15 When \$Timeout expires on the first two times

Play TimeoutHelp.\$Location

\$Timeout = 4 sec

go to Listening Timeout

When \$Timeout expires on the third time

20 Play Difficulties

go to Transfer Receptionist

End Case

Service Location:

25 Play ServiceAvailable

Play \$Location list

Play Who

go to Listening Timeout

30 Speech:

Load the active vocabulary set from \$Location

Get \$RecognizedWord from Speech Recognizer

35

Best Available Copy

Case (\$RecognizedWord)

Rejection: go to Rejection Handler

\$Name: go to Transfer Call

\$Location: go to Loc Handler

5 Key Word: go to KeyWord Handler

End Case

Transfer Call:

Database Lookup for Employee Phone Number

10 Transfer the call

go to Idle

Transfer Receptionist :

Play TransferReceptionist

15 Transfer the call to the receptionist

go to Idle

Unknown Loc:

Play NotServiced.\$Location

20 go to Listening Timeout

Index of the Prerecorded Prompts in Alphabetical Order :

Calling:

25 Calling \$Name?

Difficulties:

The system is having difficulties with your request.  
Transferring to a receptionist.

30

EmployeeName:

Employee name?

NotServiced:

35 This service is not available in \$Location. Choose  
another location or for a list of serviced ESN locations,  
say "Service Locations".



15

*ServiceAvailable:*

This service is available for the following Nortel/BNR locations: \$Location list.

5

*TransferReceptionist:*

Transferring to a receptionist.

*Who:*

10

Who would you like to call?

15

A specific embodiment of the invention has been disclosed and illustrated. It will be apparent to one skilled in the art that various changes in methodology and/or approach can be made without departing from the spirit and scope of this invention as defined in the appended claims.

20

Best Available Copy

## I CLAIM:

1. A telephone network including:
  - a plurality of telephone exchanges each for
  - 5 serving a plurality of telephone instruments and each being interconnected with at least one other of the telephone exchanges, for providing telephone communications between telephone users associated with the telephone instruments; and
  - 10 a simulated telephone operator apparatus for receiving a voiced speech request from a user for connection to another of the telephone users and translating said request into a directory number for use by one of the telephone exchanges in accordance with a speech recognition
  - 15 algorithm and an active speech recognition vocabulary selected in accordance with the origin of the request.
2. A simulated telephone operator server for a telephone network comprising:
  - 20 means for storing voice utterances of a calling party telephone user;
  - means responsive to location information in association with the telephone user for selecting an active speech recognition vocabulary;
  - 25 speech detection means for processing the stored voice utterances in accordance with a speech recognition algorithm and said active speech recognition vocabulary;
  - directory lookup means for identifying a directory listing of a called party corresponding to a result of said
  - 30 processing by the speech detection means; and
  - means for transmitting the directory listing to a telephone exchange serving said called party.
3. A simulated telephone operator server as defined
- 35 in claim 2, wherein the directory lookup means defaults to identification by a telephone attendant directory listing in the event of there being no called party directory listing

corresponding to the result of said processing by the speech detection means.

4. A telephone exchange comprising:
- 5 a plurality of ports for serving a plurality of telephone users' telephone instruments via telephone lines;
- a trunk facility for connection to another telephone exchange;
- a switching network for connecting and
- 10 disconnecting the telephone instruments;
- a controller means for causing a newly OFF HOOK telephone instrument to be coupled via the switching network with a solicitation signal, and subsequently for being responsive to a telephone number received in association
- 15 with the newly OFF HOOK telephone instrument for completing a telephone call via the switching network;
- an originating register means for storing voice band signals received from the newly OFF HOOK telephone instrument via the switching network;
- 20 means for detecting digits represented by frequency signals, within the stored voice band signals, in accordance with a standard for key pad dialed telephone numbers, and for transmitting detecting digits to the call controller;
- 25 a simulated telephone operator apparatus for receiving and translating voice band signals in accordance with a speech recognition algorithm and an active speech recognition vocabulary selected in accordance with the origin of the voice band signals into a directory number for
- 30 use by the controller means; and
- an interface facility for transmitting the stored voice band signals via the switching network to the simulated telephone operator server apparatus in an event wherein the voice band signals did not include a key pad
- 35 dialed digit.

5. A telephone exchange as defined in claim 4, wherein the call controller means is operative to cause the interface means to transmit said stored voice band signals via the switching network to the simulated telephone operator server apparatus in an event wherein the voice band signals included a key pad dialed digit designating the simulated telephone operator apparatus.

6. A simulated telephone operator apparatus for receiving a user voiced speech request for connection to another user of a telephone network and translating said request into a directory number for use by an automatic telephone exchange, in accordance with a speech recognition algorithm and an active speech recognition vocabulary selected in accordance with the origin of the request.

7. A method for detecting a calling telephone user voiced speech request for connection to another telephone user via an automatic telephone exchange comprising:

storing a plurality of speech recognition vocabularies in association with geographic locations of users;

receiving the voiced speech request and information as to the geographic location of the user having voiced the speech request from the automatic telephone exchange;

selecting an active speech recognition vocabulary in accordance with the information as to the geographic location of the user; and

in accordance with a speech recognition algorithm and the selected active speech recognition vocabulary, translating the received request into a directory number for use by the automatic telephone exchange in setting up a telephone connection between the calling telephone user and said another telephone user.

1/2

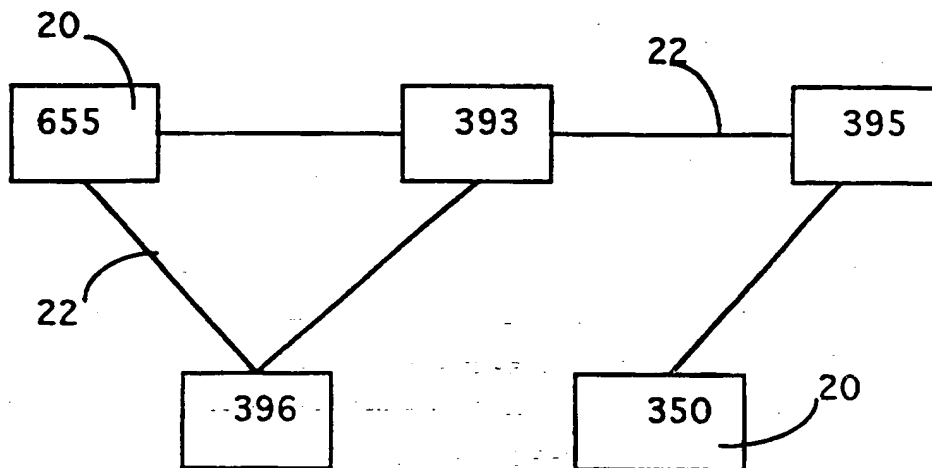


FIGURE 1

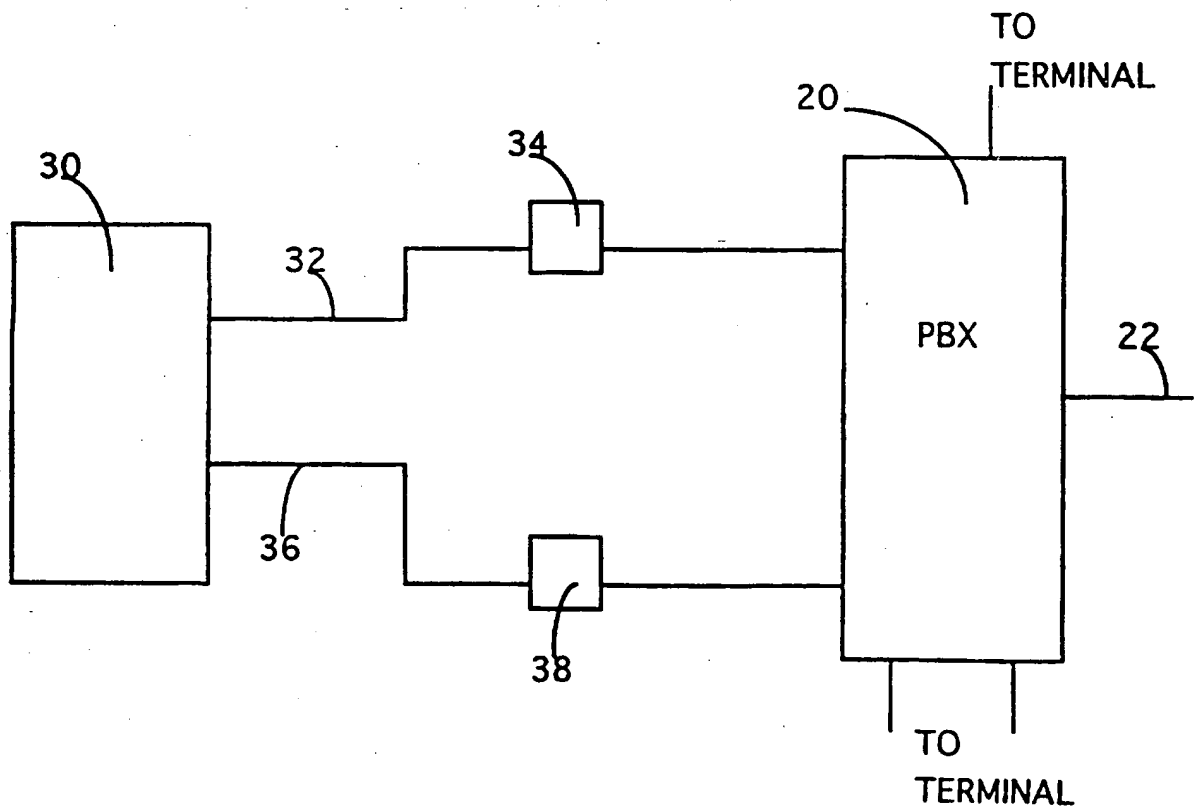


FIGURE 2

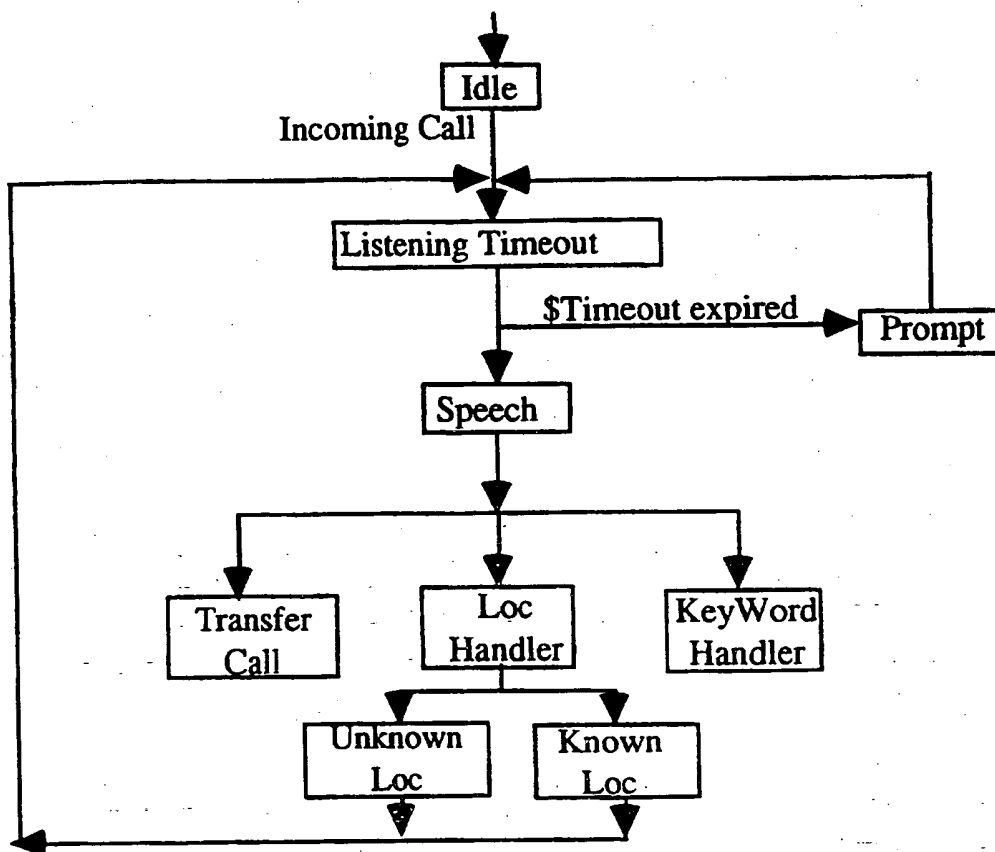


FIGURE 3

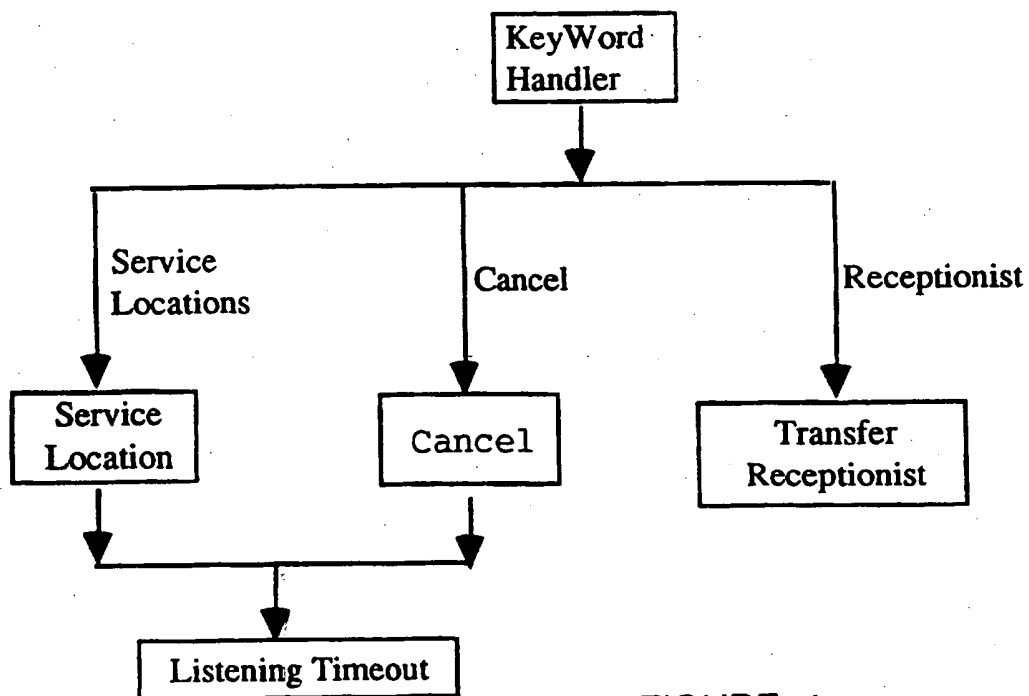


FIGURE 4

# INTERNATIONAL SEARCH REPORT

International Application No.  
PCT/CA 97/00008

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> H 04 M 1/27, G 10 L 5/06		
According to International Patent Classification (IPC) or to both national classification and IPC <sup>6</sup>		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) H 04 M, G 10 L, H 04 Q		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP, A, 0 105 441 (SIEMENS) 18 April 1984 (18.04.84), page 1, line 1 - page 3, line 32; claim 1. --	1, 2, 4, 6, 7
A	US, A, 5 165 095 (BORCHERDING) 17 November 1992 (11.11.92), abstract; column 1, line 6 - column 2, line 37; column 3, line 22 - column 6, line 27; fig. 1, 2 (cited in the application). --	1, 2, 4, 6, 7
A	EP, A, 0 568 979 (SONY CORPORATION) 10 November 1993 (10.11.93), abstract; column 1, lines	1, 2, 4, 6, 7
<div style="display: flex; justify-content: space-between;"> <span><input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.</span> <span><input type="checkbox"/> Patent family members are listed in annex.</span> </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search 21 March 1997		Date of mailing of the international search report 18. 04. 97
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+ 31-70) 340-3016		Authorized officer HAJOS e.h.

# INTERNATIONAL SEARCH REPORT

-2-

Int. Application No
PCT/CA 97/00008

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	43-50.	
A	<div style="text-align: center;">--</div> US, A, 5 390 278 (GUPTA et al.) 14 February 1995 (14.02.95), abstract (cited in the application).	1,2,4, 6,7
A	<div style="text-align: center;">--</div> EP, A, 0 045 941 (SIEMENS) 17 February 1982 (17.02.82), page 1, line 7 - page 4, line 9; fig..	1,2,4, 6,7
A	<div style="text-align: center;">--</div> US, A, 5 091 947 (ARIYOSHI et al.) 25 February 1992 (25.02.92), abstract; column 1, line 10 - column 3, line 17 (cited in the application). <div style="text-align: center;">----</div>	1,2,4, 6,7



## ANHANG

zum internationalen Recherchen-  
bericht über die internationale  
Patentanmeldung Nr.

## ANNEX

to the International Search  
Report to the International Patent  
Application No.

## ANNEXE

au rapport de recherche inter-  
national relatif à la demande de brevet  
international n°

PCT/CA 97/00008 SAE 148639

In diesem Anhang sind die Mitglieder  
der Patentfamilien der im obenge-  
nannten internationalen Recherchenbericht  
angeführten Patentdokumente angegeben.  
Diese Angaben dienen nur zur Unter-  
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family  
members relating to the patent documents  
cited in the above-mentioned inter-  
national search report. The Office is  
in no way liable for these particulars  
which are given merely for the purpose  
of information.

La présente annexe indique les  
membres de la famille de brevets  
relatifs aux documents de brevets cités  
dans le rapport de recherche inter-  
national visée ci-dessus. Les renseigne-  
ments fournis sont donnés à titre indica-  
tif et n'engagent pas la responsabilité  
de l'Office.

Im Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche		Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
EP A1	105441	18-04-84	AT E 75359 DE A1 1234567 EP A1 105441 JP B1 105441	15-07-88 08-04-81 28-07-88 22-05-88
US A	5165092	17-11-92	EP A1 427688 EP A1 508589 JP A1 508589	01-04-93 01-04-93 20-03-91
EP A1	568975	10-11-93	JP A1 551618	26-11-93
US A	5390278	14-02-95	CA A1 2069675	09-04-93
EP A1	45941	17-02-82	DE A1 3029823 DE B1 3029823 EP B1 45941	04-03-82 11-04-90 02-01-85
US A	5091947	25-02-92	JP A1 1309098 DE A1 3819176 DE B1 3819176	13-12-88 23-12-88 20-09-91

**THIS PAGE BLANK (USPTO)**